200 TO 350

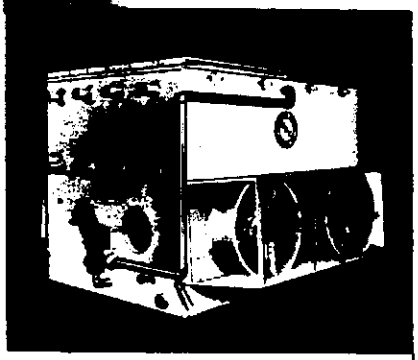

"CPA" Tubeaxial Blow-Thru

DIMENSIONS—MODEL CPA

UNIT NO.	CONN. Refrig. In	CONN. Refrig. Out	B	F	H
200	3	2	39⅝	25	106⅛
250	4	2	47⅝	34⅝	114⅛
300	4	2½	57⅞	43¾	124⅜
350	4	2½	57⅞	43¾	124⅜

All dimensions are in inches.

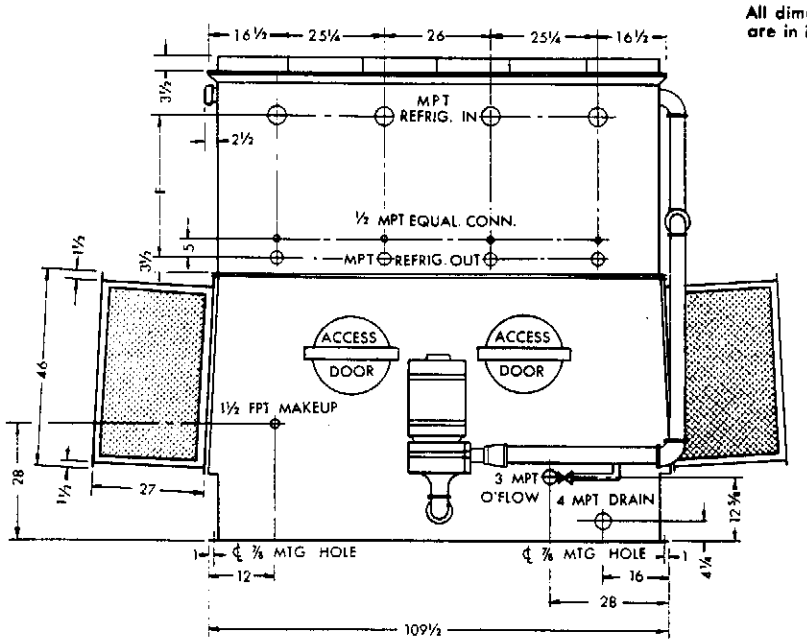

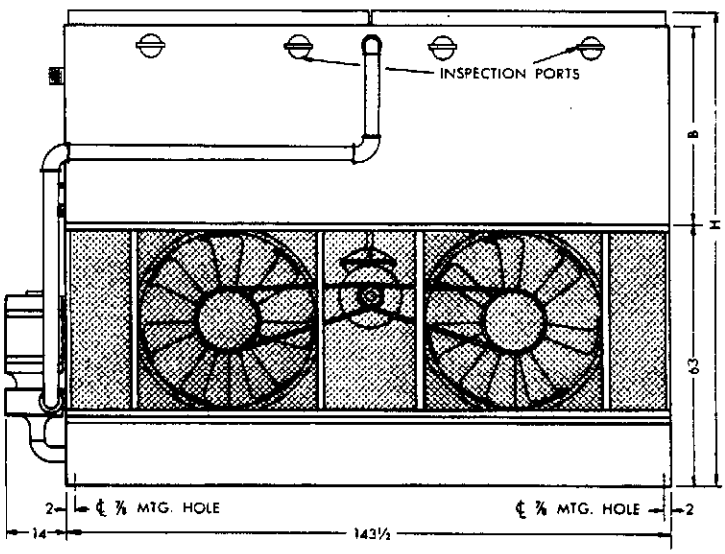

TH CMA AND CPA UNITS

METAL GAUGES
PAN: 3/16" BOTTOM
¼" SIDES
CASING: ⅛"

ENGINEERING DATA

UNIT NO.	WEIGHTS Approx. Shpg.	WEIGHTS Approx. Oper.	SECTION DATA Heaviest Section (Coil)	SECTION DATA Min. Open. for Sections	CFM	FAN MOTOR HORSEPOWER MODEL CMA 0" ESP	⅛" ESP	¼" ESP	⅜" ESP	½" ESP	MODEL CPA 0" ESP	PUMP MOTOR HP
200	18,000	24,000	10,300	63 x 110	57,000	2- 7½	2- 7½	2-10	2-10	2-10	2- 5	1½
250	21,000	27,000	13,300	63 x 110	58,000	2- 7½	2- 7½	2-10	2-10	2-10	2- 5	1½
300	24,500	30,500	16,700	63 x 110	62,000	2-10	2-10	2-10	2-15	2-15	2- 7½	1½
350	26,500	32,500	18,500	63 x 110	70,000	2-15	2-15	2-15	2-20	2-20	2-10	1½