


CUSTOMER-APV AMERICAS/FRICK CO.  
 JOB-APV SYSTEMS  
 LOCATION-BOISE, ID.  
 QUANTITY-(2) RIGHT HAND UNITS  
 NET WEIGHT-6,471 LBS. W/CURB SECTION  
 CAPACITY-9.5 TONS AT 10°F TD / -20°F ET  
 REFRIG.-PUMP RECIRC R-717 (3:1 RATE)

DEFROST- HOT GAS  
 COIL- STEEL TUBES & FINS (HDG)  
 CHARGE- 4.65 CU. FT. INT. VOL.  
 AIR FLOW- 15,720 CFM  
 FANS (1)-36" DIA. PROP. TYPE  
 MOTORS (1)- 5 HP/1160 RPM  
 460/60/3 T.E.F.C.

MARK-

- NOTES:
1. UNIT TO BE SHIPPED IN (2) PCS.
  2. 18" INSULATED STEEL CURB. (SEE DWG. 106570-5-1).
  3. RIGHT HAND UNIT SHOWN (LEFT HAND UNIT OPPOSITE)
  4. VELOCITY THRU COILS= 786 FPM
  5. COIL FACE AREA= 20.0 SQ.FT.
  6. ORIFICE FEED: 1.7 GPM LIQUID IS REQUIRED AT MINIMUM 1.3 PSI ABOVE COIL SUCTION PRESSURE AT LIQUID INLET.

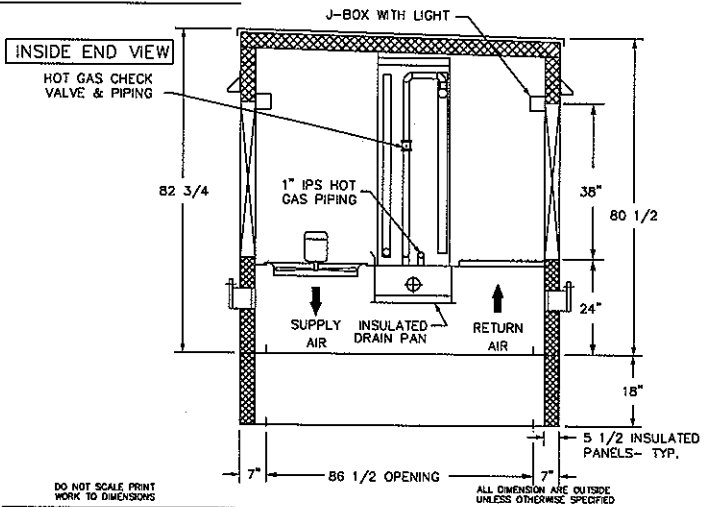

DO NOT SCALE PRINT WORK TO DIMENSIONS

CUSTOMER P.O. 6600013551		FRICK P.O. 213553	
S.O. 39650A		SHEET OF	
DATE 1/25/01	SCALE NONE	NO. REQD	NOTED
DRAWN BY <i>AP</i>	CHKD BY	APVD BY	
TITLE ROOF TOP FREEZER			
MODEL RTFS-L-201-103-5-LRB HGU-IP-PCV 20 P		DRAWING NO. 939650AR	REV A