NOTE: 3.47 PSI MINIMUM LIQUID FEED PRESSURE REQUIRED ABOVE COIL SUCTION PRESSURE

NOTE: COIL NITROGEN CHARGED FOR SHIPMENT

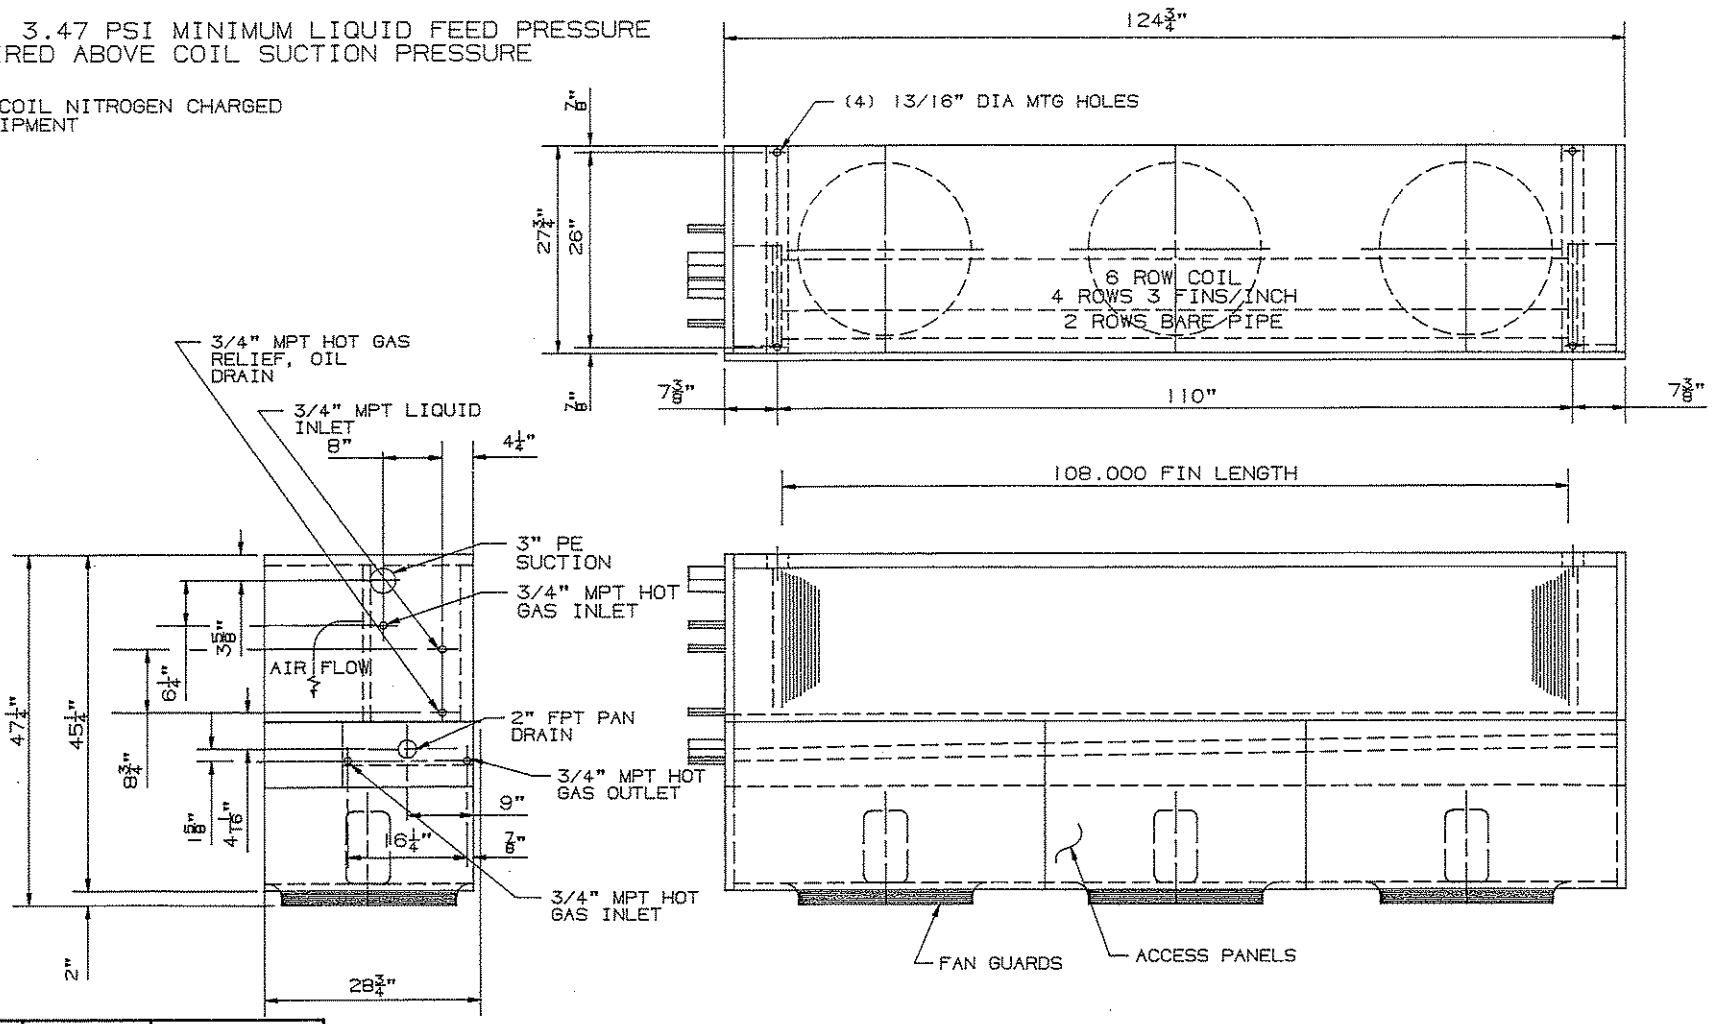

SO: 8304	PAGE: 2	QTY: (1) LH

UNIT DATA CASING: GLV SHEET PAN: HOT DIP GLV AFTER FAB INSUL W/ GLV CVR HOT GAS PAN COIL UNDER INNER PAN	FAN DATA: 14,250 CFM @ 0" ESP (3) 24" DIR DRV PROP FANS (3) 3/4 HP TEAO 1750 RPM 143T FR LTG 460-3-60 FAN MOTORS	PERFORMANCE DATA: 7.5 TONS @ 20°F TD FEED: LR, BTM, AMMONIA HOT GAS DEFROST -50°F EVAP -30°F EAT -50°F LIQUID MECH PUMPED @ 3:1 RATE	SC 14-6VF SIDE CHAMBER UNIT COOLER FOR APV CREPACO	ECN / DATE REV 1/16/92

IMECO
POLO, ILLINOIS 61064

DR: BEF
DA: 6/28/91

B-2990122