Waukesha 60 Positive Displacement Pump		
Mfg: Waukesha	Model: 60	
Stock No: DBBP185413.18a	Serial No: 81949 SS	


Waukesha Positive Displacement Pump. Model: 60. S/N: 81949 SS. Flow rate for new pump is 90 gpm with required horsepower and pressure. Discuss with salesperson your process and product to determine if this refurbished pump should handle your specific duty. (2) 6-3/8 in. rotors. (1) 2-1/2 in. s-line inlet. (1) 2-1/2 in. s-line outlet. Reliance Electric Variable Frequency Drive: 2 hp, 460 AC input volts and 460 AC output volts, 4.2 and 3.5 max amps, 50/60 Hz, and 3 phase. Reliance Electric Motor Drive: 5.0 ratio, 1750 input rpm, 281 torque, 1.57 max input hp. Reliance Electric Motor: 1.5 hp, 1725 rpm, 208-230/460-480 volts, 5.6-5.6/2.8-3 amps, 60 Hz, 3 phase. Overall dimensions: 3 ft. 4 in. L. x 1 ft. 4-1/8 in. W. x 3 ft. 11 in.















































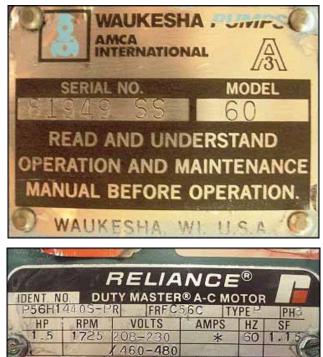

F T TYPE

200 V MIN

CONT

5.6-5.6/2.8-3.

ANE 40 NEMA

cone in

D

TE



Martin Balanter			
RELIANG		MASTER XL	(Jane)
MOSCAL	11002126	N. 1. 00	
Last LD.: Manual and and	DEM	LUB I SIGNITS	
sur 505000	IMAX INP	HATIO 1, 0	100
MODEL NO	H P	1.5/	1
NO N	CAP IN LE	10 <u>1</u>	100
MASTER PRODUCTS PAAN	n corus	RUS HEDRAN 4720 Parts	2
Contraction and the	THE		