

Lightnin Mixer

Mfg: Lightnin



Model: 73-C-15

Stock No: MASH086A

Serial No: 732146

Lightnin Mixer. Model: 73-C-15. S/N: 732146. Gear ratio: 11.4:1. Output rpm: 155. Reliance Electric motor: 15 hp, 1765 rpm, 230/460 v, 40/20 a, 60 Hz, 3 phase. (2) 2 ft. dia. impellers. Overall dimensions: 3 ft. 10 in. L x 1 ft. 5 in. W x 10 ft. 6 in. H.



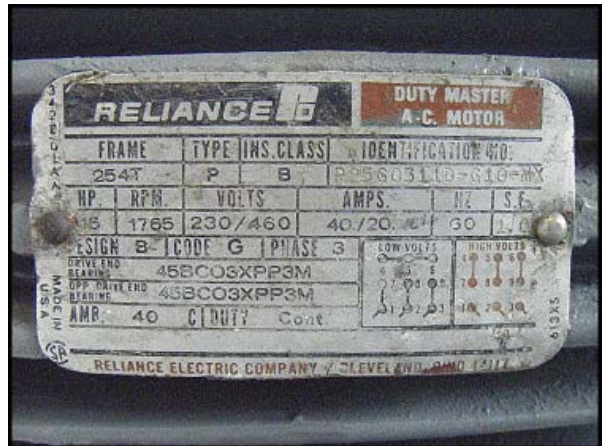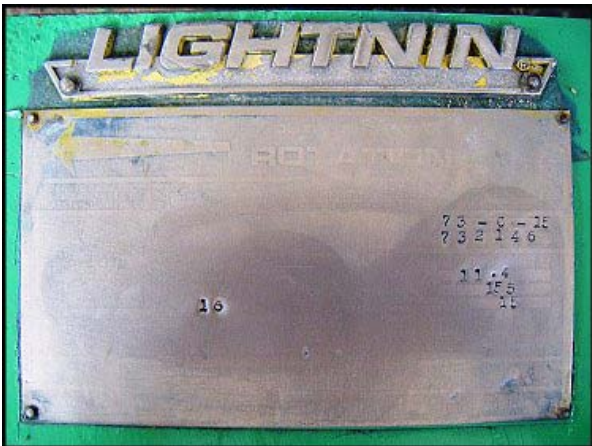

RELIANCE		DUTY MASTER A-C MOTOR	
FRAME	TYPE	INS. CLASS	IDENTIFICATION NO.
254T	P	B	P2560311D-G10-MX
HP.	RPM.	VOLTS	AMPS.
18	1765	230/460	40/20
DESIGN B-CODE G		PHASE 3	LOW VOLTS
DRIVE END BEARING 45BC03XPP3M			HIGH VOLTS
OPP. DRIVE END BEARING 45BC03XPP3M			
AMP. 40	CIRCUIT Cont		

73-0-1E
732146
11.4
15.5
11

16

MADE IN U.S.A.

RELIANCE ELECTRIC COMPANY / CLEVELAND, OHIO 44115