

## Lightnin Side Entering Mixer


Mfg: Lightnin Mixers Ltd



Model: SG-300

Stock No. SELM21

Serial No. 82/143481-02

Lightnin Side Entering Mixer. Model: SG-300. S/N: 82/143481-02. Reliance Electric Motor, 3 hp, 1725 rpm, 230/460 V, 9.0/4.5 amps, 60 Hz, 3 phase. Overall dimensions: 35-1/2 in. L x 13-1/2 in. W x 13-1/2 in. H.

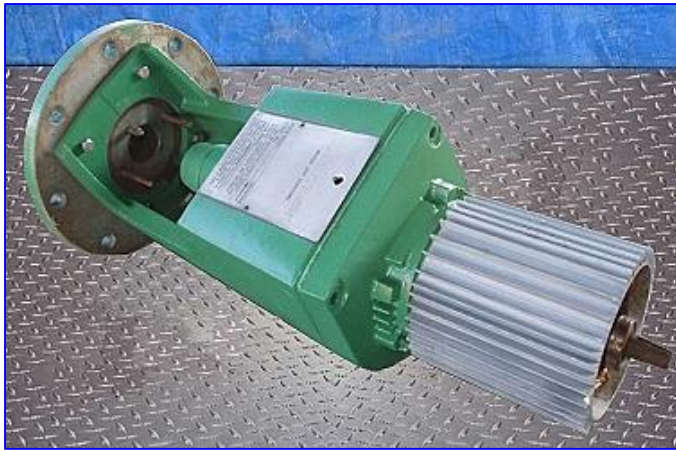

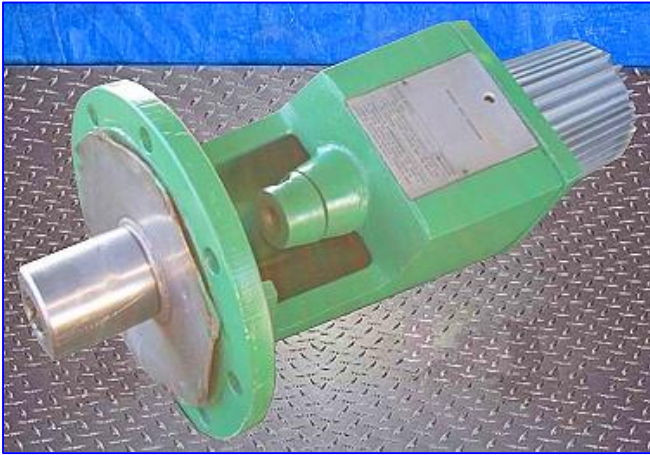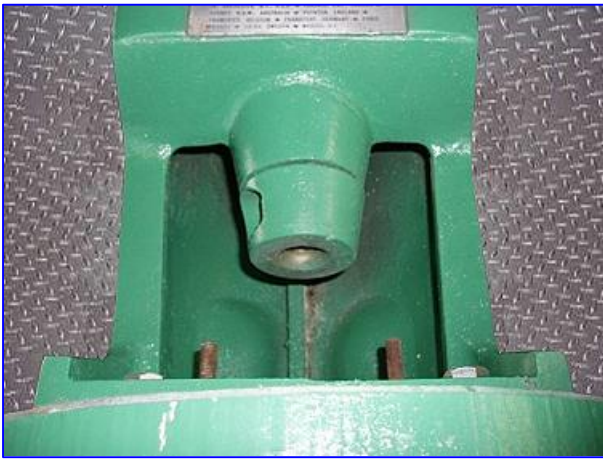

MIXER MODEL: SG-300      ROTATION ←

SERIAL NO: 82/143481-02

MAY BE PROTECTED BY PATENTS: 226 823, 3 408 051, 3 439 904, 3 091 474, 3 166 330 AND 3 249 554. OTHER PATENTS MAY BE ISSUED OR PENDING.

MEMBERS OF THE **LIGHTNIN**® GROUP ARE LOCATED IN: ROCHESTER, N.Y., U.S.A. ♦ TORONTO, ONT., CANADA ♦ SYDNEY, N.S.W., AUSTRALIA ♦ POYNTON, ENGLAND ♦ FRAMERIES, BELGIUM ♦ FRANKFURT, GERMANY ♦ PARIS, FRANCE ♦ SOLNA, SWEDEN ♦ MEXICO, D.F.

**LIGHTNIN**  
MIXERS AND APPLICATORS

IDENT: E76R7350N-T  
TYPE: PFR 180T Z PH 6  
H.P. 3      HZ 60  
R.P.M. 1725  
VOLTS 230/460  
AMPS 9.0/4.5  
CODE: 40      8 L CONT  
MIXING EQUIPMENT CO. INC.  
ROCHESTER, NEW YORK U.S.A.

WINDING COMPANY  
RELIANCE  
ROTATION