

Waukesha 30 Positive Displacement Pump


Mfg: Waukesha



Model: 30





Stock No: DBBP185419.18

Serial No: 169196 95


Waukesha Positive Displacement Pump. Model: 30. S/N: 169196 95. Flow rate for new pump is 36 gpm with required horsepower and pressure. Discuss with salesperson your process and product to determine if this refurbished pump should handle your specific duty. (2) 4-1/8 in. rotors. (1) 2-1/2 in. s-line inlet. (1) 2-1/2 in. s-line outlet. Explosion Proof Manual Starter Class 2510, Type MCR 3, Series A, 1 phase 115/230 and 460/575 volts. Reliance Electric Reeves Ultima: 3A4D size, 7.5 hp, 216 max and 27 min rpm output speeds. 17.1 gear ratio. Reliance Electric motor: 7.5 hp, 1755 rpm, 230/460 volts, 21.0/10.5 amps, 60 hz, and 3 phase. Overall dimensions: 4 ft. 5 in. L. x 1 ft. 5 in. W. x 3 ft. 5-1/2 in. H.

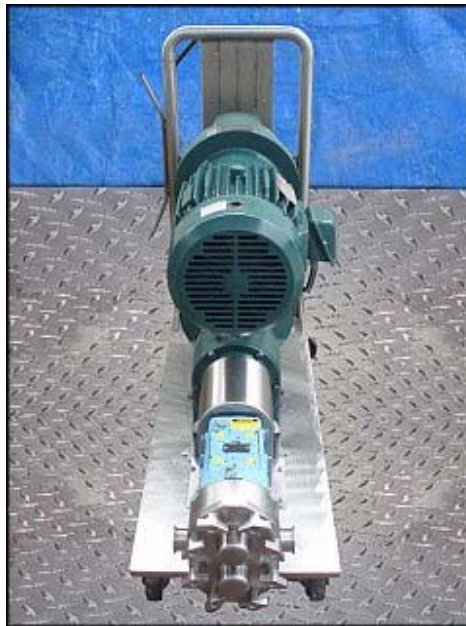

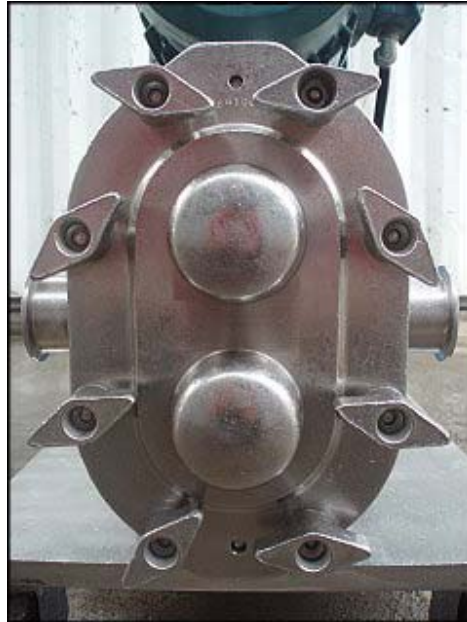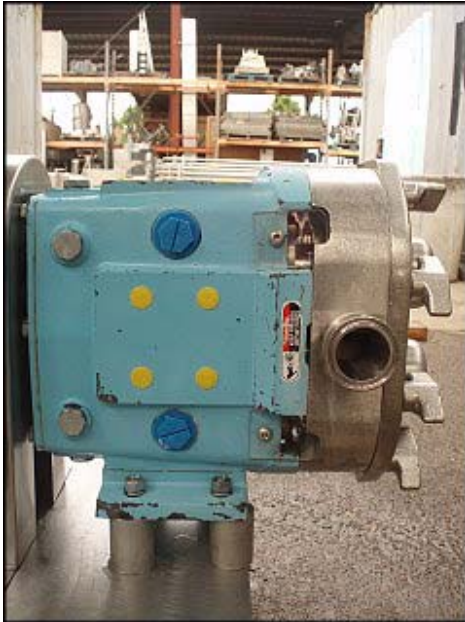

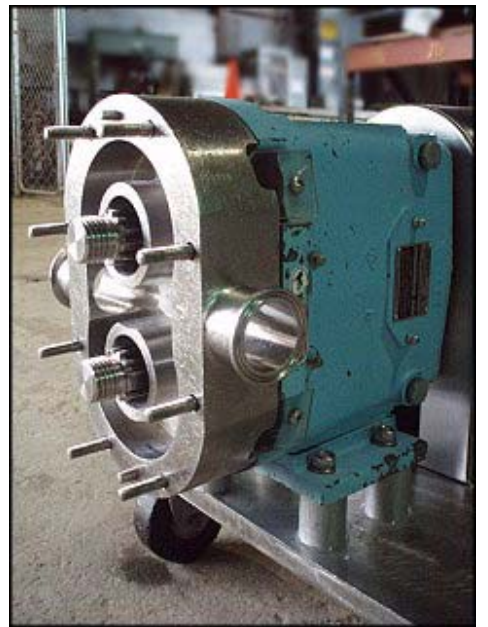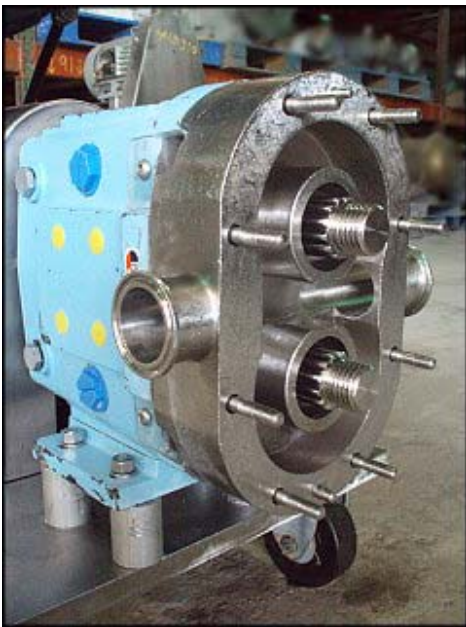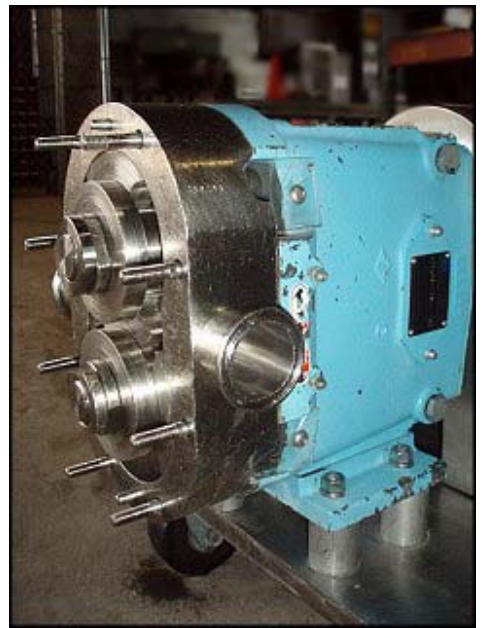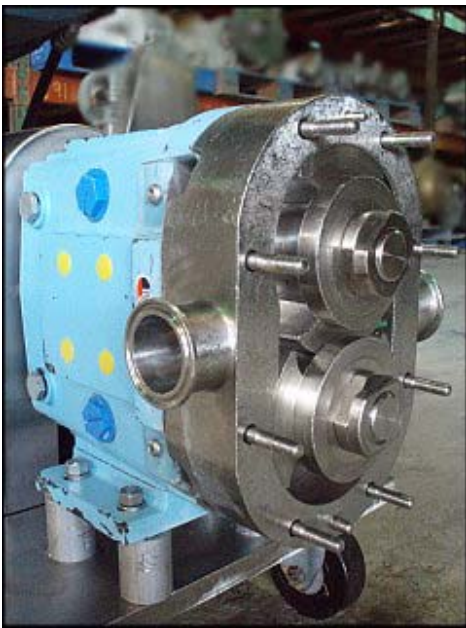





Waukesha Fluid Handling
 A United Dominion Company

 02-08

SERIAL NO.	MODEL
169196 95	30

**READ AND UNDERSTAND
 OPERATION AND MAINTENANCE
 MANUAL BEFORE OPERATION.**

DELAN, WI U.S.A.

RELIANCE ELECTRIC

STD
 STANDARD EFFICIENT

DUTY MASTER

FRAME	TYPE	DESIGN	IDENTIFICATION NO.	MODEL NO.
210TC	P	B	15GP211005 C 15 RX	P21G1005L
HP 7.5	VOLTS 230/460	HZ 60	PHASE 3	CODE H
RPM 1755	AMPS 21.0/10.5	S.F. 1.15	AMB 40 °C	INSUL CLASS F
ENCL TEFC	DUTY CONT	NEMA NOM. EFFICIENCY 84	MOTOR WEIGHT 143 LBS.	
DRIVE END BEARING 35BC02JGG30A	OPP. D.E. BEARING 30BC02JGG30A	LOW VOLTS T4 T5 T6 T7 T8 T9 T11 T2 T3 T12 T3 L1 L2 L3	HIGH VOLTS T4 T5 T6 T7 T8 T9 T11 T2 T3 L1 L2 L3	

USEABLE ON 208V @ 26.7 AMPS

RELIANCE ELECTRIC INDUSTRIAL CO.
 CLEVELAND, OHIO 44117

PLANT 041 (SPT)
 MADE IN U.S.A.

000-1-1-1

